Diesel Generator set 4008 series Engine P1100-1

1010 KVA- 1110kVA 50 Hz



Description

This FG Wilson commercial generator set is a fully integrated power generation system, providing optimum performance, reliability, and versatility for stationary Standby, Prime Power, and Continuous duty applications.

Features

FG Wilson engine - Rugged 4- cycle industrial diesel delivers reliable power, fuel optimized and fast response to load changes.

Permanent Magnet Generator (PMG) - Offers enhanced motor starting and fault clearing short circuit capability.

Alternator - Several alternator sizes offer selectable motor starting capability with low reactance 2/3 pitch windings, low waveform distortion with non-linear loads and fault clearing short-circuit capability.

Cooling system – Standard integral set-mounted radiator system, designed and tested for rated ambient temperatures, simplifies facility design requirements for rejected heat.

Control system - Standard DSE7410 electronic control provides total system integration including remote start/stop, precise frequency and voltage regulation, alarm and status message display, protection, output metering, auto-shutdown.

Enclosures - Optional weather-protective and sound-attenuated enclosures are available.

Warranty and service - Backed by a comprehensive warranty and worldwide distributor network.

circuit breaker - Optional 3 or 4 pole motorized circuit breaker available.

ISO 8528-5 – Refer to factory for site and configuration specific transient performance classification

Generator set specifications

Output Ratings

	Prime	Standby
400/230V, 50Hz	1010 KVA	1110 KVA
	808 KW	888 KW

Performance class	Genset models have been tested in accordance with ISO 8528-5.
Voltage regulation, no load to full load	± 0.8%
Random voltage variation	± 0.8%
Frequency regulation	Isochronous
Random frequency variation	± 0.25%
Electromagnetic Compatibility Performance	Fuel optimized

Engine specifications

Ratings and Performance Data

Engine Make		Perkins
Engine Model		4008TAG2A
Alternator Make		FG Wilson
Alternator Model		FGL70050/LSA Options Available
Control Panel		DSE7410
Base Frame		Heavy Duty Fabricated Steel
Circuit Breaker Type		1600A, 3P/Options Available
Frequency		50 Hz
Engine Speed: RPM	rpm	1500
Fuel Tank Capacity:	liters (US gal)	N/A

Engine Technical Data

No. of Cylinders		8
Alignment		In-line
Cycle		4
Bore	mm (in)	160 (6.3)
Stroke	mm (in)	190 (7.5)
Induction		TURBOCHARGED AIR TO AIR CHARGE COOLED
Cooling Method		WATER
Governing Type		ELECTRONIC
Governing Class		ISO 8528
Compression Ratio		13.6:1
Displacement	L (cu. in)	30.6 (1864.9)
Moment of Inertia:	kg m² (lb/in²)	15.62 (53376)
Voltage		24
Ground		Negative
Battery Charger		40
Engine Weight Dry	kg (lb)	3250 (7165)
Engine Weight Wet	kg (lb)	3428 (7557)

JMG INTL

Engine Performance Data

Engine Speed	rpm	1500
Gross Engine Power Prime	kW (hp)	899 (1206)
Gross Engine Power Standby	kW (hp)	985 (1321)
BMEP Prime	kPa (psi)	2353 (341.3)
BMEP Standby	kPa (psi)	2579 (374)

Fuel system

Recommended fuel to conform to: ... ... .BS2869 1998 Class A2 or BS EN590
Type of injection system ... ... Direct injection
Fuel injection pump ... ... Combined unit injector
Fuel injector... ... ... Combined unit injector
Fuel injector opening pressure... ... ...234 bar
Fuel lift pump. ... ... Tuthill TCH 1-054
Delivery/hour at 1500 rev/min ... ... .660 liters
Heat retained in fuel to tank... ... ... .4,5 kW
Temperature of fuel at lift pump to be less than. ... ... .58 °C
Fuel lift pump pressure. ... ...300 kPa
Fuel lift pump maximum suction head... ... ...2.5 m
Fuel filter spacing... ... ...10 microns
Governor type ... ... Electronic
Torque at the governor output shaft... ... ...0,917 kg.m
Static injection timing. ... ... See engine number plate
Tolerance on fuel consumption. ... ... To ISO 8528-1 1993

Fuel Filter	Replaceable Element			
Recommendation fuel	Class A2 Diesel			
Ful Consumption at	110%	100%	75%	50%
50 Hz Prime l/hr.	240	214	156.5	108.9
50 Hz standby l/hr.	-	240	172.7	117.6

Cooling system

Recommended coolant: 50% inhibited ethylene glycol or 50% inhibited propylene glycol and 50% clean fresh water. For combined heat and power systems and where there is no likelihood of ambient temperature below 10 °C, then clean ‘soft’ water may be used, treated with 1% by volume of Perkins inhibitor in the cooling system.
Nominal jacket water pressure in crankcase. ... ... 170 kPa
the following is a guide based on ambient air conditions of 52 °C on a Perkins supplied radiator.
Total coolant capacity:
Engine only... ... ... .48 liters
ElectropaK (engine/radiator):
-tropical. ... ...149 liters
-temperate. ... ...143 liters
Pressure cap setting. ... ... .69 kPa
Fan ... ... Incorporated in radiator
Diameter
-tropical. ... ... 1400 mm (pusher)
-temperate. ... ... 1214 mm (pusher)
Ambient cooling clearance (open ElectropaK prime power) based on air temperature at fan 3 °C above ambient.
Maximum additional restriction (duct allowance) to cooling airflow (Prime power applications) and resultant minimum airflow.

		50 Hz
Cooling System Capacity	L (US gal)	123 (32.5)

JMG INTL

Water Pump Type:		Centrifugal
Heat Rejected to Water & Lube Oil: Prime	kW (Btu/min)	332 (18881)
Heat Rejected to Water & Lube Oil: Standby	kW (Btu/min)	349 (19847)
Heat Radiation to Room*: Prime	kW (Btu/min)	122.3 (6955)
Heat Radiation to Room*: Standby	kW (Btu/min)	146.4 (8326)
Radiator Fan Load:	kW (hp)	27 (36.2)
Radiator Cooling Airflow:	m^3/min (cfm)	870 (30724)
External Restriction to Cooling	Pa (in H2O)	250 (1)

*: Heat radiated from engine and Alternator

Air System (at 50 Hz)

Air Filter Type		Replaceable Element
Combustion Air flow Prime	m^3/min	75
Combustion Air Flow Standby	m^3/min	80.5
Max. Combustion Air Intake Restriction	kPa	3.7

Lubricating System

Oil Filter Type:		Spin-On, Full Flow
Total Oil Capacity:	l (US gal)	166 (43.9)
Oil Pan Capacity:	l (US gal)	153 (40.4)
Oil Type:		API CG4 15W-40
Oil Cooling Method:		WATER

Exhaust system		
Maximum Allowable Back Pressure:	kPa (in Hg)	8 (2.4)
Exhaust Gas Flow: Prime	m^3/min (cfm)	200 (7063)
Exhaust Gas Flow: Standby	m^3/min (cfm)	200 (7063)
Exhaust Gas Temperature: Prime	°C (°F)	438 (820)
Exhaust Gas Temperature: Standby	°C (°F)	465 (869)

Alternator Physical Data

No. Of bearings	1
Insulation Class	H
Winding Pitch	2/3
Winding Code	6S
Wiers	6
IP	IP23
Excitation System	SHUNT
AVR Model	R150

Alternator Operating Data

Overseed	rpm	2250
Voltage Regulation (steady State)	%	±0.8
Wave Form NEMA= TIF	%	50
Wave form=THF	%	2
Total Harmonic content LL/LN	%	3.5
Radio Interference		EN61000-6
Radiant Heat	KW	46.4

Alternator Performance Data


Voltage Code		415/240V	400/230V	380/220V
Motor Starting capability*	KVA	1575	1473	1342

JMG INTL

Short Circuit capacity**	%	270	270	270
Reactances	Xd	3.24	3.48	3.86
	X'd	0.15	0.162	0.179
	X''d	0.129	0.129	0.143

*Based on 30% voltage dip at 0.4 power factor
** With optional independent excitation system (PMG / AUX winding)

Dimensions (Open Set)

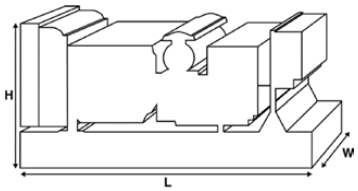

Length mm	4788
Width mm	2046
Height mm	2519

Control Panel Specification Data

DSE 7410



Key Features

- Configurable power-up mode
- MPU fail delay
- Enhanced graphical user interface
- Drag & drop advanced PLC editor
- MSC ID within PLC GenComm override
- 4-Line back-lit LCD text display
- Five key menu navigation
- Front panel editing with PIN protection
- 11 configurable inputs
- 8 configurable outputs
- Flexible sensor inputs
- 3 Configurable timers and alarms
- Configurable event log (250)
- Integral PLC editor
- CAN and Magnetic Pick-up/Alt. sensing
- Fuel usage monitor and low fuel alarms
- kW protection
- Reverse power (kW) protection
- Power monitoring (kW.h, kV Ar, kV A h, kV Ar h)
- Fully configurable via DSE Configuration Suite PC software

Key Benefits

- 132 x 64-pixel ratio display for clarity
- Real-time clock provides accurate event logging
- Set maintenance periods can be configured to maintain optimum engine performance
- Built-in-in-ethernet communications provides advanced remote monitoring
- Modules can be integrated into building management systems (BMS) using MODBUS
- increased input and output expansion capability via DSENet
- IP65 rating (with supplied gasket) offers increased resistance to water ingress
- Data logging to assist with fault finding
- PLC editor allows user configurable functions to meet specific application requirements
- License-free PC software

Specifications

- continuous voltage rating 8V to 35V continuous
- Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries
- Maximum operating current260 mA at 12 V, 130 mA at 24
- charge fail 0 V to 35 V
- output A (fuel)15A DC at supply voltage
- output B (start)15A DC at supply voltage
- output C&D 8A DC at supply voltage
- Output E to J 2 A DC at supply voltage
- BUS 15V to 333V AC L-N
- MPU ±0.5 to 70V

JMG INTL

Codes or standards compliance may not be available with all model configurations – consult factory for availability.

ISO 8528	This generator set has been designed to comply with ISO 8528 standards.
ISO 3046	This generator set performance and test methods comply with ISO 3046
BS 5000	This generator set comply with the British standards used for engine and generators
IEC 60034	This generator performance complies with the international standard for rotating electrical machines